




Part # RVS-Triple Spring

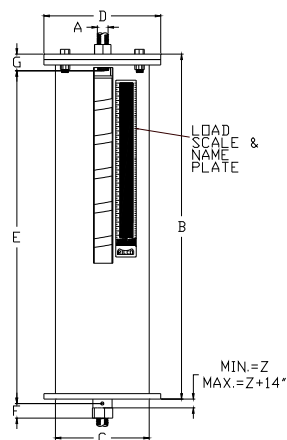

TYPE A

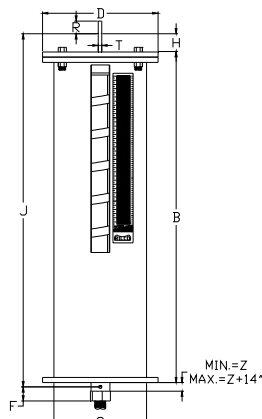

TYPE B

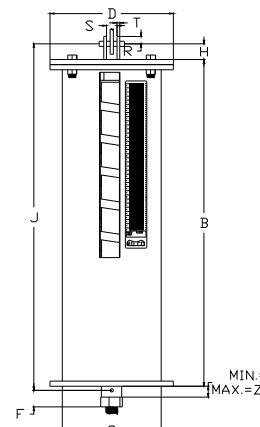

TYPE C

RILCO "Variable Triple Spring Hanger" has all of the features of our RSV-268 and is designed to the same exacting specifications.

Each basic unit consists of three springs arranged in series within a single casing and a centering guide to assure the permanent alignment of the spring assembly.


This hanger is offered in the seven basic types shown on this and the following page.

The Variable Selection Chart for sizing instructions are found at the beginning of this section.


Weights (lbs) * Dimensions (inches)

Weights (lbs) * Dimensions (inches)																	
Hanger Size	Type F										Type G			Weight			
	E' Bottom Flange		Bottom Flange		Load Col. Dia.	Load Flange		Channel Size	Max C-C	Space Between Channels-W	Type						
	Size Sq.	Bolt Circle				Dia.	Thick				A,B,C	D,E	F	G			
		Min	Max	Bolts											Thick		
0	7-1/2	7	8-3/4	5/8	1/4	1.90	3-7/8	3/16	C3 x 4.1	24	5/8	17	17	29	53		
1	7-1/2	7	8-3/4	5/8	1/4	1.90	3-7/8	3/16	C3 x 4.1	24	5/8	20	20	30	59		
2	7-1/2	7	8-3/4	5/8	1/4	1.90	3-7/8	3/16	C3 x 4.1	24	5/8	23	23	33	65		
3	7-1/2	7-3/4	8-3/4	3/4	1/4	2.88	5-3/4	3/16	C3 x 4.1	30	3/4	30	29	50	77		
4	7-1/2	7-3/4	8-3/4	3/4	1/4	2.88	5-3/4	3/16	C3 x 4.1	30	3/4	35	33	56	86		
5	7-1/2	7-3/4	8-3/4	3/4	1/4	2.88	5-3/4	3/16	C3 x 4.1	30	3/4	38	36	59	92		
6	9	8	10-7/8	3/4	3/8	3.50	6-3/8	1/4	C3 x 4.1	36	1	57	56	89	131		
7	9	8	10-7/8	3/4	3/8	3.50	6-3/8	1/4	C3 x 4.1	36	1	69	68	104	155		
8	9	8	10-7/8	3/4	3/8	3.50	6-3/8	1/4	C3 x 4.1	36	1	87	74	108	191		
9	13-1/4	10-9/16	16-1/2	3/4	1/2	4.50	8-3/8	1/2	C4 x 5.4	36	1-1/4	131	126	189	281		
10	13-1/4	10-9/16	16-1/2	3/4	1/2	4.50	8-3/8	1/2	C4 x 5.4	36	1-1/4	156	147	210	332		
11	13-1/4	10-9/16	16-1/2	3/4	1/2	4.50	8-3/8	1/2	C4 x 5.4	36	1-1/4	132	128	186	284		
12	13-1/4	10-9/16	16-1/2	3/4	1/2	4.50	8-3/8	1/2	C5 x 6.7	36	1-1/2	147	141	201	320		
13	13-1/4	10-9/16	16-1/2	3/4	1/2	4.50	8-3/8	1/2	C5 x 6.7	36	1-1/2	201	194	257	428		
14	13-1/4	10-9/16	16-1/2	3/4	1/2	4.50	8-3/8	1/2	C5 x 6.7	33	1-1/2	215	206	267	455		
15	13-1/4	10-9/16	16-1/2	3/4	1/2	4.50	8-3/8	1/2	C6 x 10.5	36	1-1/2	237	224	281	513		
16	13-1/4	10-9/16	16-1/2	3/4	1/2	2.00	8-3/8	1/2	C8 x 11.5	36	2-1/8	306	282	341	651		
17	13-1/4	10-9/16	16-1/2	3/4	1/2	2.00	8-3/8	1/2	C8 x 11.5	36	2-1/8	389	350	410	816		
18	17-1/4	15-3/4	22	3/4	5/8	2.50	12-1/2	1/2	C12 x 20.7	42	2-3/8	723	671	780	1494		
19	17-1/4	15-3/4	22	3/4	5/8	2.50	12-1/2	1/2	C12 x 20.7	42	2-3/8	855	777	891	1757		
20	17-1/4	15-3/4	22	3/4	5/8	2.50	12-1/2	1/2	C12 x 20.7	40	2-3/8	1158	1040	1166	2360		
21	17-1/4	15-3/4	22	3/4	5/8	3.00	12-1/2	1/2	C15 x 33.9	48	3-1/8	1365	1223	1263	2858		
22	17-1/4	15-3/4	22	3/4	5/8	3.00	12-1/2	1/2	C15 x 33.9	48	3-3/8	1815	1665	1731	3759		


Part # RVS-Triple Spring

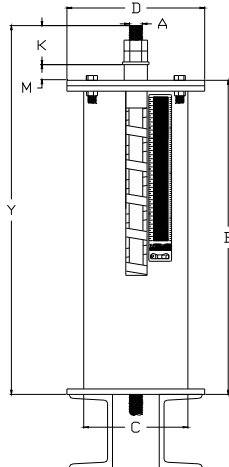


TYPE D

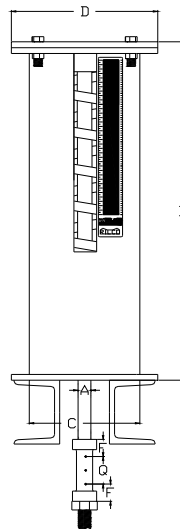

TYPE E

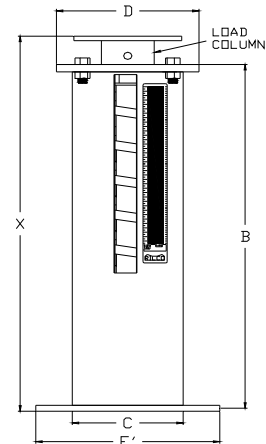

TYPE F

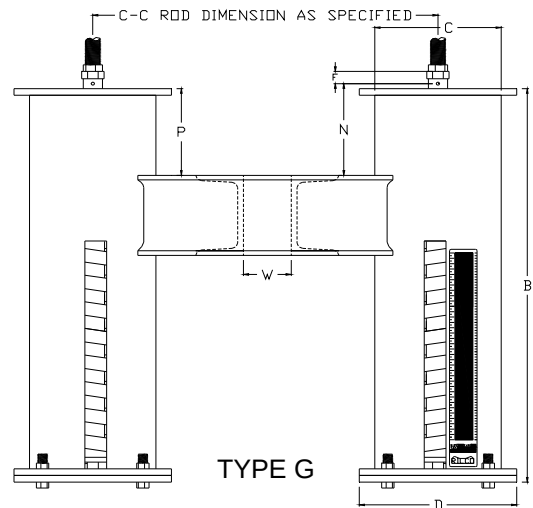

TYPE G

Weights (lbs) * Dimensions (inches)

Hanger Size	Rod Size "A"	R.H. Thread Length	Casing		Min Thread Engage "F"	"Z"	Rod Take Out By Type					Type A Thread Depth "G"	Type D		TYPE F		TYPE G
			Length "B"	Dia. "C"			A	B,C	D	E	G		"K"	"M"	Loaded Length Dim X		
															"E"	"J"	
0	1/2	12	19-1/8	4	15/16	15/16	19-1/8	20-5/8	28-1/8	11-1/8	1-1/2	7/16	1-1/4	7-3/4	20-9/16	22-13/16	1-1/2
1	1/2	12	21-3/4	4	15/16	11/16	21-3/4	23-1/4	30-3/4	11-1/8	1-1/2	7/16	1-1/4	7-3/4	23-3/16	25-7/16	1-1/2
2	1/2	12	24	4	15/16	1-1/16	24	25-1/2	33	11-1/8	1-1/2	7/16	1-1/4	7-3/4	25-7/16	27-11/16	1-1/2
3	1/2	12	21-3/16	5-9/16	15/16	9/16	21-3/16	22-11/16	30-3/16	11-1/8	2	7/16	1-1/4	7-3/4	23-1/4	25-5/8	2
4	1/2	12	23-1/16	5-9/16	15/16	1-3/16	23-1/16	24-9/16	32-1/16	11-1/8	2	7/16	1-1/4	7-3/4	24-3/8	26-9/16	2
5	1/2	12	25-1/8	5-9/16	15/16	1-1/16	25-1/8	26-5/8	34-1/8	11-1/8	2	7/16	1-1/4	7-3/4	26-7/16	28-11/16	2
6	5/8	12	25	6-5/8	15/16	13/16	25	26-1/2	34-3/16	11-1/8	2	5/8	1-1/2	7-11/16	26-9/16	28-5/8	2
7	5/8	13	27-15/16	6-5/8	15/16	1-1/16	27-15/16	29-7/16	37-1/8	11-1/8	2	5/8	1-1/2	7-11/16	29-3/8	31-11/16	2
8	5/8	13	29-5/16	6-5/8	15/16	13/16	29-5/16	30-13/16	38-1/2	11-1/8	2	5/8	1-1/2	7-11/16	30-5/16	32-1/2	2
9	3/4	13	29-9/16	8-5/8	1-1/4	1-1/8	29-9/16	31-1/16	38-7/8	11-1/2	3	1	1-3/4	7-9/16	30-9/16	32-3/4	3
10	3/4	13	33-1/4	8-5/8	1-1/4	1-3/8	33-1/4	34-3/4	42-9/16	11-1/2	3	1	1-3/4	7-9/16	34-1/8	36-13/16	3
11	3/4	13	26-11/16	8-5/8	1-1/4	1-3/16	26-11/16	28-3/16	36	11-1/2	3	1	2	7-9/16	27-9/16	30-3/4	3
12	1	13	28-9/16	8-5/8	1-1/4	7/8	28-9/16	30-9/16	38-3/8	11-1/2	3-7/8	1	2-1/4	7-9/16	30	32-3/8	4
13	1	14	36-1/4	8-5/8	1-1/4	1	36-1/4	38-1/4	46-1/16	11-1/2	3-7/8	1	2-1/2	7-9/16	37-1/2	40-1/16	4
14	1-1/4	14	36-3/4	8-5/8	1-1/4	3/4	36-3/4	39-5/8	47-5/16	11-1/2	4	1	2-1/2	7-9/16	39	41-1/16	4
15	1-1/4	14	36-5/8	8-5/8	1-1/4	3/4	36-5/8	39-1/2	47-3/16	10-9/16	4	1	3	7-9/16	36-7/8	39-1/16	4
16	1-1/2	15	44-1/16	8-5/8	1-15/16	2	44-1/16	47-1/16	54-5/8	11-1/16	4	1-3/8	3-1/2	7-1/16	44-3/8	47-3/16	4
17	1-3/4	15	50-1/4	8-5/8	1-15/16	2	50-1/4	53-1/4	61-5/16	11-9/16	4	1-3/8	4	7-1/16	50-1/4	53	4
18	2	16	49-1/8	12-3/4	2-3/4	2-1/2	49-1/8	53-1/8	60-11/16	10-7/8	4	2-1/4	4-9/16	7	48-7/8	51-1/16	4
19	2-1/4	16	55-7/8	12-3/4	2-3/4	2-9/16	55-7/8	60-3/8	67-7/8	11-7/16	4	2-1/4	5	7	54-5/8	56-11/16	4
20	2-1/2	17	65-5/8	12-3/4	2-3/4	2-11/16	65-5/8	70-1/8	78-3/16	11-15/16	4	2-1/4	5-9/16	7	66-1/4	68-1/4	4
21	2-3/4	17	73-5/16	12-3/4	3-5/8	2-3/4	73-5/16	76-13/16	87-7/8	11	4	2-3/4	6-1/4	9-5/16	72-5/16	76-7/16	4
22	3	18	91-1/2	12-3/4	3-5/8	2-3/4	91-1/2	95-1/2	106-7/16	11-1/2	4	3	6-5/8	9-5/16	90-1/2	94-5/8	4