
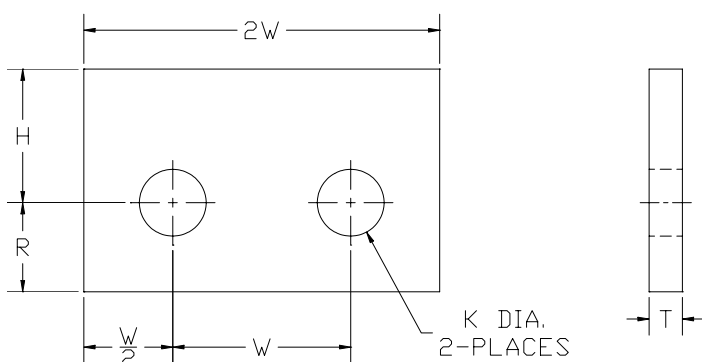


Beam Lug Attachment

Part # 104

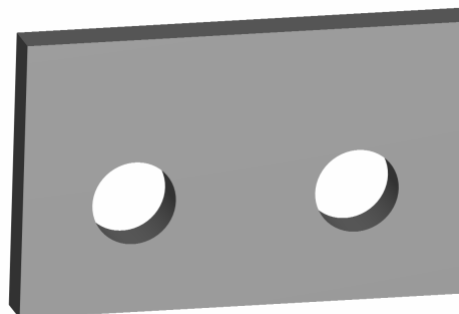

SIZE RANGE: For use with rod sizes 1/2 " to 2 1/2" inches.

MATERIAL TYPES: Carbon Steel

FINISH: Black, Galvanized, or coated to customer specifications

APPLICATIONS: For single rod suspension of part #RCS 81– H, Type B & C Constant Supports.

ORDERING: Specify rod size, part number, name, finish, and "H" dimension.

Loads (lbs) • Weights (lbs) • Dimensions (inches)

Rod Size	*Maximum Load	**Weight "H" Dimension				***Rod Take-out "H" Constant Support Frame Sizes				Pin or Bolt	K Hole	R	T	W	2W	W/2
		1 1/2	2	3	4	1 1/2	1 1/2	3	4							
1/2	1350	1.4	1.7	2.2	-	1 1/2	1 1/2	3	-	5/8	11/16	1 1/4	3/8	2 1/2	5	1 1/4
5/8	2160	1.4	1.6	2.2	-	1 1/2	1 1/2	3	-	3/4	13/16	1 1/4	3/8	2 1/2	5	1 1/4
3/4	3230	1.3	1.6	2.1	2.6	-	1 1/2	3	4	7/8	15/16	1 1/4	3/8	2 1/2	5	1 1/4
1	5900	-	2.6	3.5	4.3	-	-	3	4	1 1/8	1 1/4	1 1/2	1/2	3	6	1 1/2
1 1/4	9500	-	5.0	6.5	7.9	-	-	3	4	1 3/8	1 1/2	2	5/8	4	8	2
1 1/2	13800	-	-	10.7	12.8	-	-	3	4	1 5/8	1 3/4	2 1/2	3/4	5	10	2 1/2
1 3/4	18600	-	-	10.4	12.5	-	-	3	4	1 7/8	2	2 1/2	3/4	5	10	2 1/2
2	24600	-	-	-	16	-	-	-	4	2 1/4	2 3/8	3	3/4	6	12	3
2 1/4	32300	-	-	-	15.6	-	-	-	4	2 1/2	2 5/8	3	3/4	6	12	3

* Based on the allowable stresses shown in the ASME Code for Pressure Piping

** Select "H" Dimension Applicable to Constant Support Frame Size

*** Weight varies with "H" dimension