


Part # 310



Steel Pipe Clamps Double Bolt Pipe Clamp

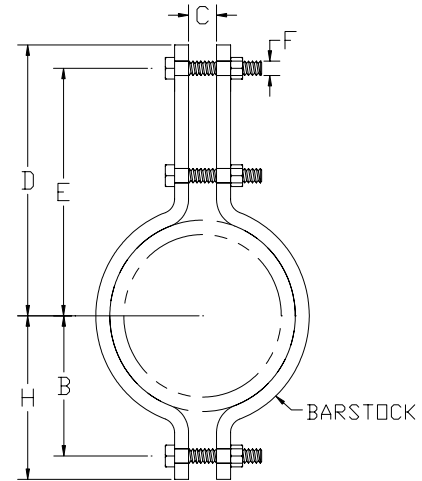

SIZE RANGE: 3/4" to 36" inches.

MATERIAL TYPES: Carbon Steel

FINISH: Black, Galvanized, or coated to customer specifications.

APPLICATIONS: Recommended for suspension of pipe requiring insulation and where flexibility of the clamp is desirable - within the limitation of temperature and loads shown below.

APPROVALS: Complies with Manufacturers Standardization Society SP-69 (Type 3).

MAXIMUM TEMPERATURE: 750° F (398°C)

ORDERING: Specify pipe size, part number, name and finish.

Load (lbs) • Weight (lbs) • Dimensions (inches)

Pipe Size	*Maximum Load		Weight	B	C	D	Rod Take Out E	F	H	BARSTOCK
	650° (F)	750° (F)								
3/4	950	-	0.70	15/16	5/8	2 7/8	2 7/16	3/8	1 3/8	3/16 X 1
1	950	-	0.8	1 1/16	5/8	3	2 9/16	3/8	1 1/2	3/16 X 1
1 1/4	950	-	0.8	1 1/4	5/8	3 1/8	2 11/16	3/8	1 11/16	3/16 X 1
1 1/2	1545	1380	2.3	1 13/16	1 1/16	4 7/8	4 1/8	5/8	2 3/8	1/4 X 1 1/4
2	1545	1380	2.6	2 1/8	1 1/16	5 7/8	5 1/8	5/8	2 11/16	1/4 X 1 1/4
2 1/2	1545	1380	2.7	2 5/16	1 1/16	6 1/8	5 3/8	5/8	2 15/16	1/4 X 1 1/4
3	1545	1380	3.0	2 3/4	1 1/16	6 11/16	5 15/16	5/8	3 1/2	1/4 X 1 1/4
4	2500	2230	6.7	3 3/8	1 1/16	7 5/8	6 1/2	3/4	4 1/2	5/16 X 2
5	2500	2230	7	3 15/16	1 1/16	8 1/8	7	3/4	5	5/16 X 2
6	2865	2555	11.5	4 3/4	1 7/16	9 11/16	8 9/16	7/8	6 1/8	3/8 X 2 1/2
8	2865	2555	13.2	5 3/4	1 7/16	10 11/16	9 9/16	7/8	7 1/8	3/8 X 2 1/2
10	3240	2890	19.8	6 7/8	1 7/16	12	10 7/16	1	8 1/4	1/2 X 2 1/2
12	3240	2890	22.3	7 7/8	1 7/16	13	11 7/16	1	9 1/4	1/2 X 2 1/2
14	4300	3835	37.7	9 1/16	2	14 5/16	12 11/16	1 1/4	10 11/16	5/8 X 3
16	4300	3835	41.4	10 1/16	2	15 5/16	13 11/16	1 1/4	11 11/16	5/8 X 3
18	4300	3835	44.9	11 1/16	2	16 5/16	14 11/16	1 1/4	12 11/16	5/8 X 3
20	5490	4900	57.3	12 3/8	2	17 5/8	15 7/8	1 3/8	14	3/4 X 3
24	4500	4015	65.9	14 3/8	2	19 5/8	17 7/8	1 3/8	16	3/4 X 3
28	6000	-	112.3	17 1/2	2 1/4	24 1/4	21 3/4	1 1/4	20	3/4 X 4
30	7500	-	150.0	18 1/2	2 1/2	26 1/8	23 3/8	1 3/8	21 1/4	3/4 X 5
32	8250	-	193.3	19 5/8	2 1/2	28	25	1 1/2	22 5/8	3/4 X 6
34	9800	-	248.8	21 1/2	3	31 1/4	27 3/4	1 3/4	25	1 X 5
36	10500	-	257.5	22 1/2	3	32 1/4	28 3/4	1 3/4	26	1 X 5

* Based on Allowable stresses shown in the ASME Code for Pressure Piping