


Alloy Steel Pipe Clamp

Part # 320

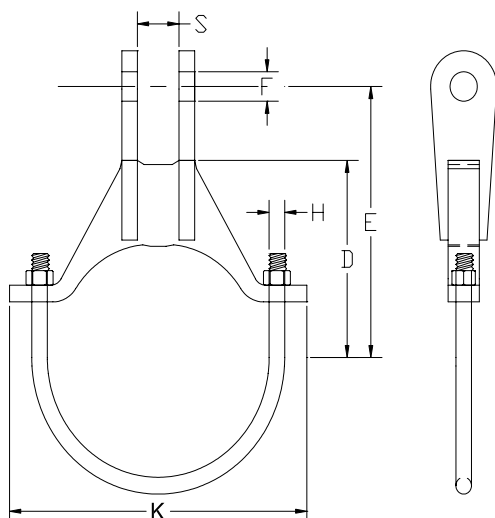

SIZE RANGE: 4" to 16" inches.

MATERIAL TYPES: Chrome molybdenum steel except U-bolt which is stainless steel.

FINISH: Black, Galvanized, or coated to customer specifications.

APPLICATIONS: Recommended for suspension high temperature pipe requiring up to 4" inches of insulation.

APPROVALS: Complies with Manufacturers Standardization Society SP-69 (Type 2)

MAXIMUM TEMPERATURE: 1050°F (565°C)

ORDERING: Specify pipe size, part number, name and finish.

Load (lbs) • Weight (lbs) • Dimensions (inches)

Pipe Size	*Maximum Load				Weight	D	Rod Take Out E	F	H	K	S
	750° F	950° F	1000° F	1050° F							
4	3780	3300	2770	1890	4.0	3 ⁷ / ₈	6 ³ / ₄	⁷ / ₈	¹ / ₂	6 ¹ / ₂	1 ¹ / ₁₆
6	6060	5290	4440	3030	7.5	5 ⁷ / ₁₆	8 ⁵ / ₁₆	1	⁵ / ₈	9 ¹ / ₈	1 ⁷ / ₁₆
8	6060	5290	4440	3030	9.0	6 ¹¹ / ₁₆	9 ⁹ / ₁₆	1	⁵ / ₈	11 ¹ / ₈	1 ⁷ / ₁₆
10	9060	7910	6640	4420	15.8	8 ³ / ₈	10 ⁷ / ₈	1 ¹ / ₈	³ / ₄	13 ⁵ / ₈	1 ⁷ / ₁₆
12	12570	10980	9015	6010	24.3	10 ¹ / ₈	12 ⁷ / ₈	1 ¹ / ₂	⁷ / ₈	16 ¹ / ₈	1 ¹⁵ / ₁₆
14	12570	10980	9015	6010	26.3	11 ¹ / ₈	13 ⁷ / ₈	1 ¹ / ₂	⁷ / ₈	17 ³ / ₈	1 ¹⁵ / ₁₆
16	12570	10980	9015	6010	31.0	12 ¹ / ₄	15	1 ¹ / ₂	⁷ / ₈	19 ⁵ / ₈	1 ¹⁵ / ₁₆

* Based on Allowable stresses shown in the ASME Code for Pressure Piping